


Page : 1/1

RSP 1142




Tecofi'
FAREX FLUID SOLUTION DESIGNER

Full bore
Anti-blow out stem
With gland pack

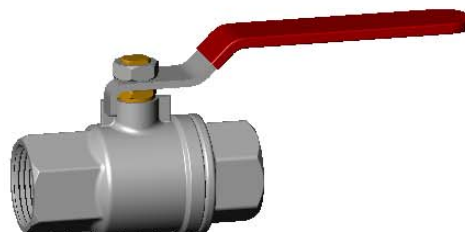

6	1	Packing	PTFE
5	1	Stem	Brass
4	1	Ball	Chromed brass
3	2	Seat	PTFE
2	1	Interior body	Brossed brass
1	1	Exterior body	Nickeled brass
Pos.	Qty.	Description	Material

DN		H	L	P	Weight (kg)
mm	inch				
8	1/4"	41,8	44	81,5	0,13
12	3/8"	41,8	44	81,5	0,12
15	1/2"	47,8	51	85	0,16
20	3/4"	55,5	57	92	0,24
25	1"	60,5	63	106	0,36
32	1"1/4	68,1	77	117,5	0,55
40	1"1/2	75,3	85	131	0,82
50	2"	86,8	95	151,5	1,20
65	2"1/2	101,5	120	185	2,28
80	3"	122	141	225	3,56
100	4"	137,5	160	225	5,33

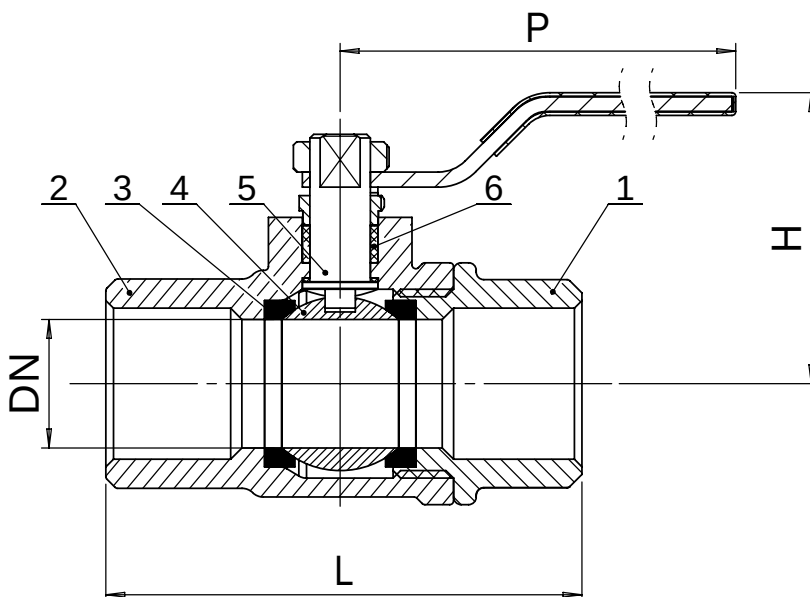

Maximum temperature : - 10°C / + 120°C.
Maximum working pressure : DN 1/4" - 3/8" : 25 bar
DN 1/2" - 4" : 16 bar

BSP threaded according to standard ISO 228-1.